
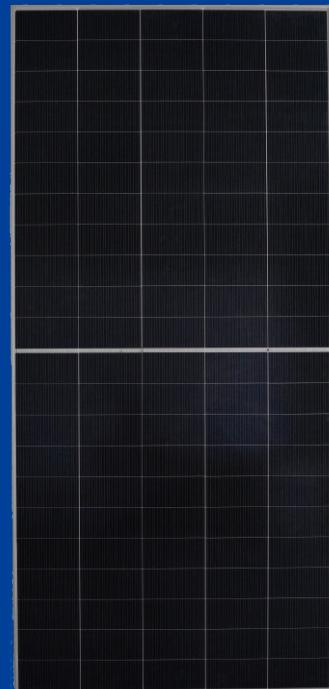


210 HETEROJUNCTION MODULE

ULTRA-HIGH POWER GENERATION ULTRA-LOW CARBON EMISSION

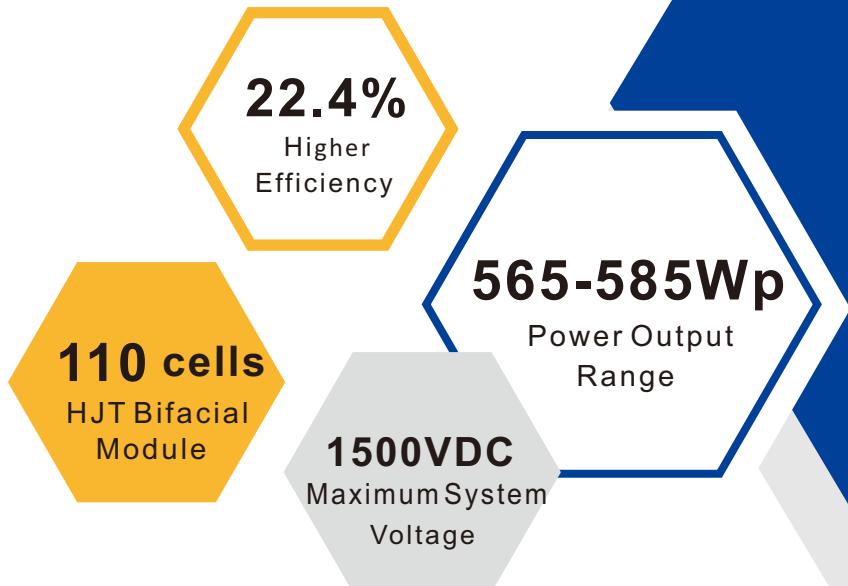


RSM110-8-565-585BHDG

KEY SALIENT FEATURES:

- Global, Tier 1 bankable brand, with independently certified state-of-the-art automated manufacturing
- N-type solar cell without LID caused by B-O
- PID Resistance
- Better Temperature Coefficient
- Bifacial technology enables additional energy harvesting from rear side

- Higher power generation
- Module Imp binning radically reduces string mismatch losses
- Excellent wind load 2400Pa & snow load 5400Pa under certain installation method
- Comprehensive product and Management system certification
 - ♦ IEC61215:2016; IEC61730-1/-2:2016;
 - ♦ ISO 9001:2015 Quality Management System
 - ♦ ISO 14001:2015 Environmental Management System
 - ♦ ISO 45001:2018 Occupational Health and Safety Management System

LINEAR PERFORMANCE WARRANTY

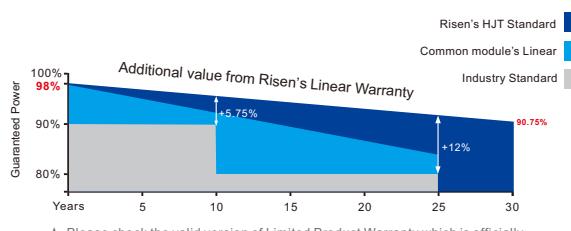

* Please check the valid version of Limited Product Warranty which is officially released by Risen Energy Co., Ltd

- Product Warranty
- Linear Power Warranty
- Power retention rate within 30 years



RISEN ENERGY CO., LTD.

Add: Tashan Industry Zone, Meilin, Ninghai 315609

Tel: 400-8291-000




Fax: +86-574-59953599

E-mail: marketing@risenenergy.com

Website: www.risenenergy.com

* As there are different certification requirements in different markets, please contact your local Risen Energy sales representative for the specific certificates applicable to the products in the region in which the products are to be used.

Dimensions of PV Module

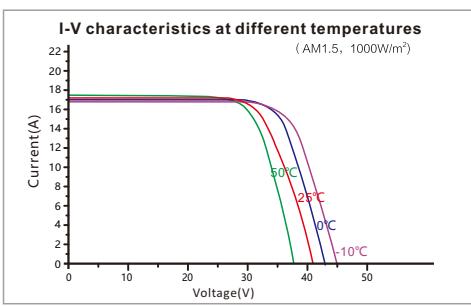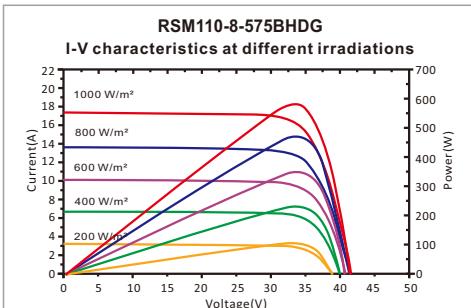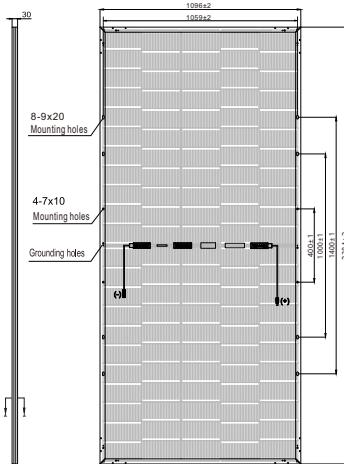

Our Partners:

ELECTRICAL DATA (STC)

Model Number	RSM110-8-565BHDG	RSM110-8-570BHDG	RSM110-8-575BHDG	RSM110-8-580BHDG	RSM110-8-585BHDG
Rated Power in Watts-Pmax(Wp)	565	570	575	580	585
Open Circuit Voltage-Voc(V)	41.18	41.27	41.36	41.46	41.55
Short Circuit Current-Isc(A)	17.47	17.57	17.67	17.77	17.88
Maximum Power Voltage-Vmpp(V)	34.53	34.60	34.68	34.76	34.84
Maximum Power Current-Impp(A)	16.39	16.49	16.60	16.71	16.81
Module Efficiency (%) *	21.6	21.8	22.0	22.2	22.4

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3. Bifacial factor:85±10(%) * Module Efficiency (%): Round-off to the nearest number

Electrical characteristics with 10% rear side power gain

Total Equivalent power-Pmax (Wp)	622	627	633	638	644
Open Circuit Voltage-Voc(V)	41.18	41.27	41.36	41.46	41.55
Short Circuit Current-Isc(A)	19.21	19.32	19.44	19.55	19.66
Maximum Power Voltage-Vmpp(V)	34.53	34.60	34.68	34.76	34.84
Maximum Power Current-Impp(A)	18.03	18.14	18.26	18.38	18.50

Rear side power gain: The additional gain from the rear side compared to the power of the front side at the standard test condition. It depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.

ELECTRICAL DATA (NMOT)

Model Number	RSM110-8-565BHDG	RSM110-8-570BHDG	RSM110-8-575BHDG	RSM110-8-580BHDG	RSM110-8-585BHDG
Maximum Power-Pmax (Wp)	431.7	435.4	439.3	443.1	447.0
Open Circuit Voltage-Voc (V)	38.59	38.67	38.75	38.85	38.93
Short Circuit Current-Isc (A)	14.32	14.40	14.49	14.57	14.66
Maximum Power Voltage-Vmpp (V)	32.29	32.36	32.43	32.50	32.58
Maximum Power Current-Impp (A)	13.37	13.46	13.55	13.63	13.72

NMOT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	HJT cell
Cell configuration	110 cells (5×11+5×11)
Module dimensions	2384×1096×30mm
Weight	33±0.5kg
Superstrate	High Transmission, AR Coated Heat Strengthened Glass
Substrate	Heat Strengthened Glass
Frame	Anodized Aluminium Alloy, Silver Color
J-Box	Potted, IP68, 1500VDC, TÜV&UL Certified
Cables	4.0mm ² (12AWG), Positive(+)350mm, Negative(-)230mm (Connector Included)
Connector	Risen Twinsel PV-SY02, IP68

TEMPERATURE & MAXIMUM RATINGS

Nominal Module Operating Temperature (NMOT)	43°C±2°C
Temperature Coefficient of Voc	-0.22%/°C
Temperature Coefficient of Isc	0.047%/°C
Temperature Coefficient of Pmax	-0.24%/°C
Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC
Max Series Fuse Rating	35A
Limiting Reverse Current	35A

PACKAGING CONFIGURATION

Number of modules per container	40ft(HQ)
Number of modules per pallet	700
Number of pallets per container	35
Packaging box dimensions (LxWxH) in mm	2395×1105×1235
Box gross weight[kg]	1223

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.
©2022 Risen Energy. All rights reserved. Contents included in this datasheet are subject to change without notice.
No special undertaking or warranty for the suitability of special purpose or being installed in extraordinary surroundings
is granted unless as otherwise specifically committed by manufacturer in contract document.